


# Horizon 2

## User Manual

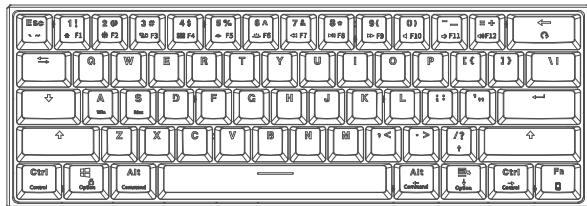

Keys	61 Keys	Package Includes
Size	L293xW103xH42mm	1x Keyboard
LEDs	RGB	1x USB-C Cable
Keycaps	PBT doubleshot keycaps	1x Keycap Puller
Switch Type	Outemu Silent Sky	1x Instruction Manual
Connection	Bluetooth + Wired USB-C	Supported Operating Systems
Battery Capacity	1800mAh	Windows 7/8/10, Mac OS, iOS, Android, Linux
Cord Length	1.8m	
Product Weight	604g/1.33lb	

### Charging

1. "Fn" key backlight LED will flash red repeatedly when keyboard battery power is low.
2. The space bar backlight LED will light up red while battery is charging.
3. Once the battery has been fully charged, red space bar LED will shut off
4. Backlights will automatically shut off after 1 minute without use. After 30 minutes without use, the keyboard will enter standby mode and disconnect from bluetooth. Press any key to wake the board and resume use.

### Bluetooth Connection


- Fn + R: Toggle between wired/bluetooth modes
- Fn + Q/W/E: Set bluetooth profile, supports up to 3 bluetooth connections

### Bluetooth Pairing

1. Set switch on the back of the keyboard to the "On" position.
2. Press and hold Fn + Q/W/E for 3-5 seconds. The "R" key LED will begin to flash repeatedly to indicate that the keyboard is ready to connect to a new device over bluetooth.
3. On the device you wish to connect to, begin to search for bluetooth devices and select "Bluetooth Keyboard" once it appears on the device.
4. Once the keyboard has connected to the device, the "R" key will stop flashing to indicate successful bluetooth pairing.
5. The keyboard can support bluetooth connections for up to 3 devices. Long press Fn + Q/W/E to set up a connection to a new device. Short press to connect to a previously paired device that is associated with a particular profile.

### Key Functions

The keyboard supports dual function operation and is 100% compatible with Windows and Mac OS. The keyboard has N-key rollover for detection of all keypresses.

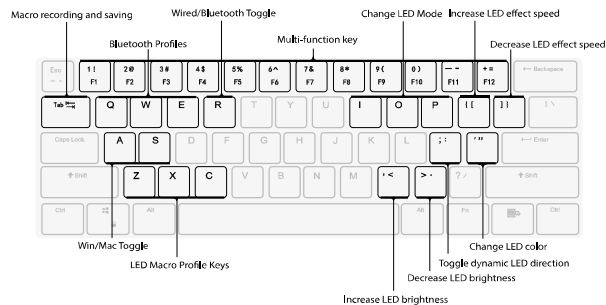

	Windows	Mac OS		
Fn+1	F1	☀️	Fn+S	Mac OS mode
Fn+2	F2	☀️	Fn+A	Windows mode
Fn+3	F3	🖱️	Fn+Tab	Macro recording and saving
Fn+4	F4	🖱️	Fn+R	Toggle between wired/bluetooth modes
Fn+5	F5	☁️	Fn+Q/W/E	Bluetooth profiles
Fn+6	F6	☁️	Fn+Z/X/C	LED macro-recording keys
Fn+7	F7	⏪	Fn+Backspace(3sec)	Reset keyboard
Fn+8	F8	⏩	Fn+Win	Toggle Windows key lock
Fn+9	F9	⏩		
Fn+10	F10	⏪		
Fn+11	F11	🔊		
Fn+12	F12	🔊		

Fn + Left Ctrl: Toggle between top row F1-F12 function row keys or numbers. When the keyboard is in function row key mode, left Ctrl key LED will be white.

### Backlight Settings

- Fn + I/O/P: Switch backlight modes. Each key has 6 different modes for a total of 18 backlight modes.
- Fn + > : Increase LED brightness
- Fn + < : Decrease LED brightness
- Fn + [ : Increase LED effect speed
- Fn + ] : Decrease LED effect speed
- Fn + ; : Change LED effect direction
- Fn + " : Change LED color
- Fn + Z/X/C : LED macro recording keys

### Backlight Macro Recording

1. Press Fn + Z/X/C. Each key can store one backlight mode macro.
2. Press Fn + Tab. The Ctrl, Caps, and Windows keys will flash repeatedly to indicate that backlight macro recording has begun.
3. Press the keys that you wish to set backlighting for.
4. Press Fn + Tab again to stop backlight macro recording. The Ctrl, Caps, and Windows keys will stop flashing and custom backlight settings will be saved to the chosen profile.